


1007832

MODEL SHORT S8 CUSTOMER DRAWING

A  
B  
C  
D  
E  
F  
G  
H  
I

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

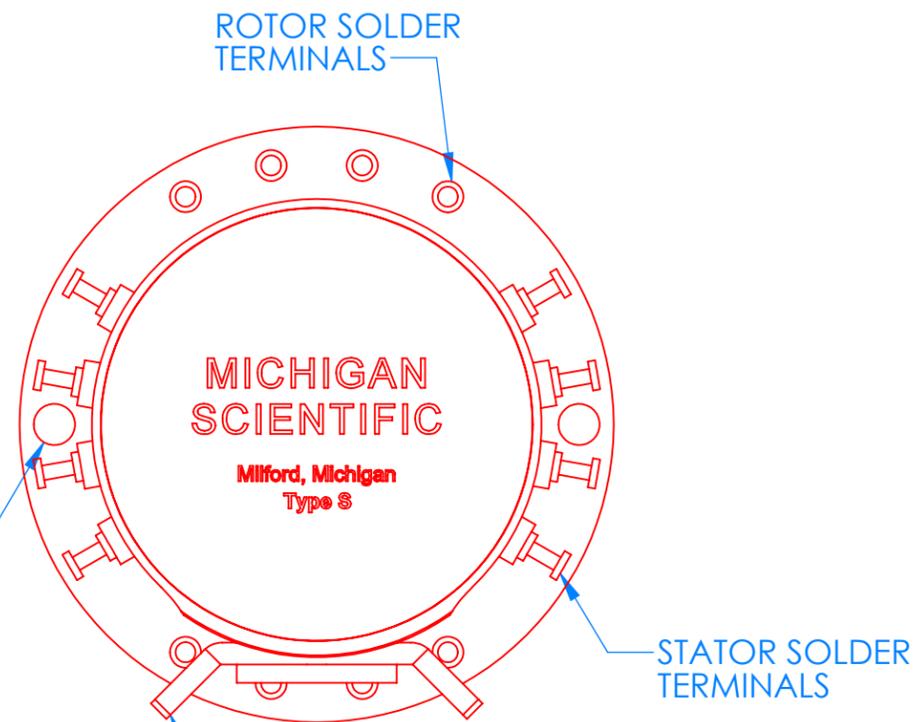


2X EQUALLY SPACED  
4-40 CLEARANCE HOLES  
ON  $\phi$  1.435 [36.45] B.C.

ROTOR SOLDER  
TERMINALS

STATOR SOLDER  
TERMINALS

TABS TO ATTACH STATOR RESTRAINT.  
USE A FLEXIBLE CABLE OR SOFT SPRING AS A STATOR RESTRAINT.  
DO NOT USE THE STATOR CABLE.  
UNIT TORQUE IS APPROXIMATELY 3 OZ-IN [.02 N-M].

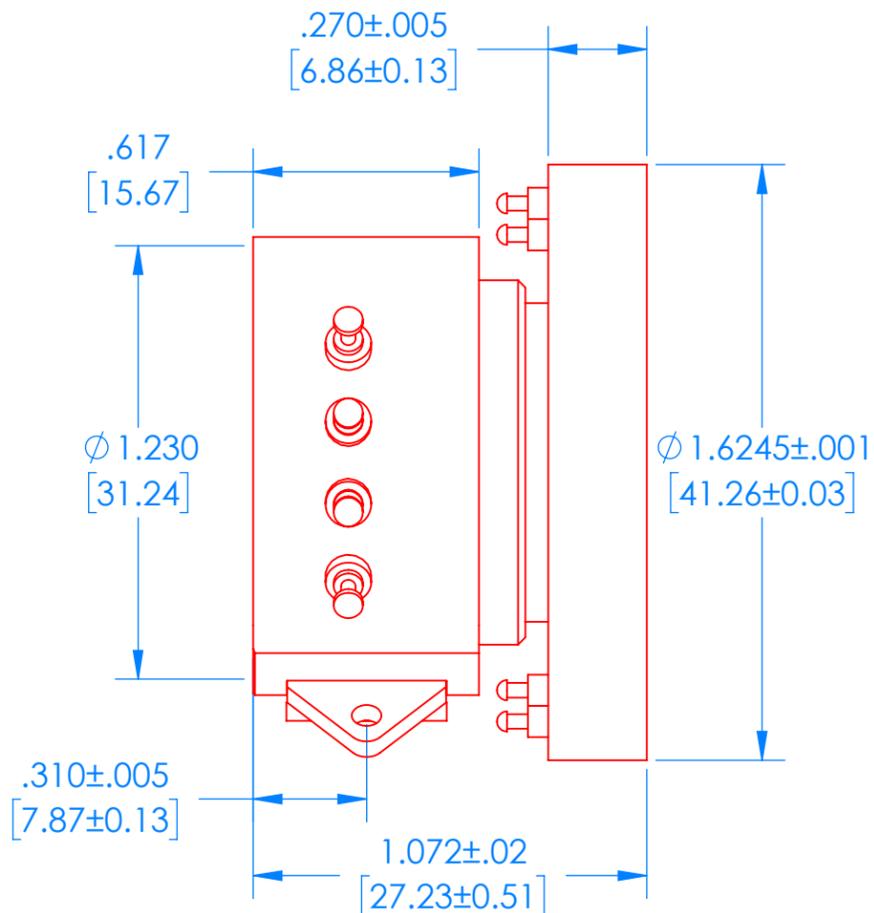

DIMENSIONS ARE IN [mm] in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX $\pm$ .0010 .XXX $\pm$ .005 .XX $\pm$ .01 FRACTIONAL $\pm$ ANGULAR: MACH $\pm$ BEND $\pm$		 <b>MICHIGAN SCIENTIFIC CORPORATION</b> 8500 ANCE ROAD CHARLEVOIX, MICHIGAN 49720 www.michsci.com	
WEIGHT		PRODUCT LINE: CUSTOMER CODE: PROJECT CODE:	
MATERIAL		DESCRIPTION: SHORT S8 CUSTOMER MODEL	
FINISH		SIZE DWG. NO. <b>B</b> 1007832	REV <b>A</b>
		SCALE: 2:1	SHEET 1 OF 1

Details and specifications provided in this document are purely for informational purposes and are subject to alterations. No liability is accepted for errors or omissions. ©2020 Michigan Scientific Corporation